
EcoCare Shower Mixer



COLOUR/FINISHES PRESSURE TYPE All Pressures MINIMUM PRESSURE MAXIMUM PRESSURE 500kPa (As per 3500.1) CARTRIDGE/HEADWORKS MAXIMUM TEMPERATURE 65°C PLUMBING CONNECTION 15mm	
PRESSURE TYPE MINIMUM PRESSURE MAXIMUM PRESSURE MAXIMUM PRESSURE 500kPa (As per 3500.1) CARTRIDGE/HEADWORKS HiFlo Cartridge MAXIMUM TEMPERATURE 65°C	
MINIMUM PRESSURE 35kPa MAXIMUM PRESSURE 500kPa (As per 3500.1) CARTRIDGE/HEADWORKS HiFlo Cartridge MAXIMUM TEMPERATURE 65°C	
MAXIMUM PRESSURE 500kPa (As per 3500.1) CARTRIDGE/HEADWORKS HiFlo Cartridge MAXIMUM TEMPERATURE 65°C	
3500.1) CARTRIDGE/HEADWORKS HIFlo Cartridg MAXIMUM TEMPERATURE 65°C	
MAXIMUM TEMPERATURE 65°C	r NZ Building Code AS/NZ
	е
PLUMBING CONNECTION 15mm	
FACEPLATE DIAMETER 116mm	
CERTIFICATION WaterMark Co	rtified

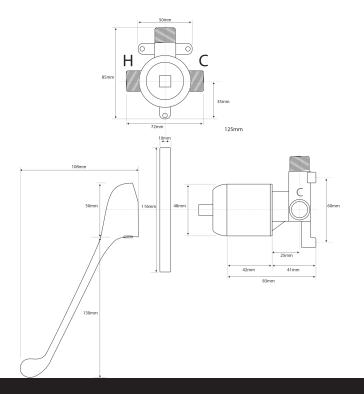

Voda Plumbingware products are in full compliance with the requirements as set out in the New Zealand Building Code:

www.vodaplumbingware.co.nz/building-code-clauses/

This product is not subject to a warning or ban under section 26 of the Building Act 2004.

Specifications and dimensions correct at time of publication however are subject to change without notice. Please refer to physical product prior to installation.

Installation instructions for this product are available from the product page on vodaplumbingware.co.nz

