

Floor Mounted Bath Filler

Congratulations on your purchase of this high quality product from Voda Plumbingware. Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressures only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa* (As per NZ Building Code AS/NZ 3500.1)

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Not suitable.


Equal Low systems Not suitable.

INSTALLATION

FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE.

THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.

1. Unscrew brass base plate (A) from the cover plate (B).
2. Screw the brass base plate (A) onto base of spout (D) and test fit on floor for alignment to bath, mark screw holes on floor.
3. Unscrew brass base plate (A) from spout (D), then align base plate to markings on floor and screw onto the floor using the 4x screws provided.

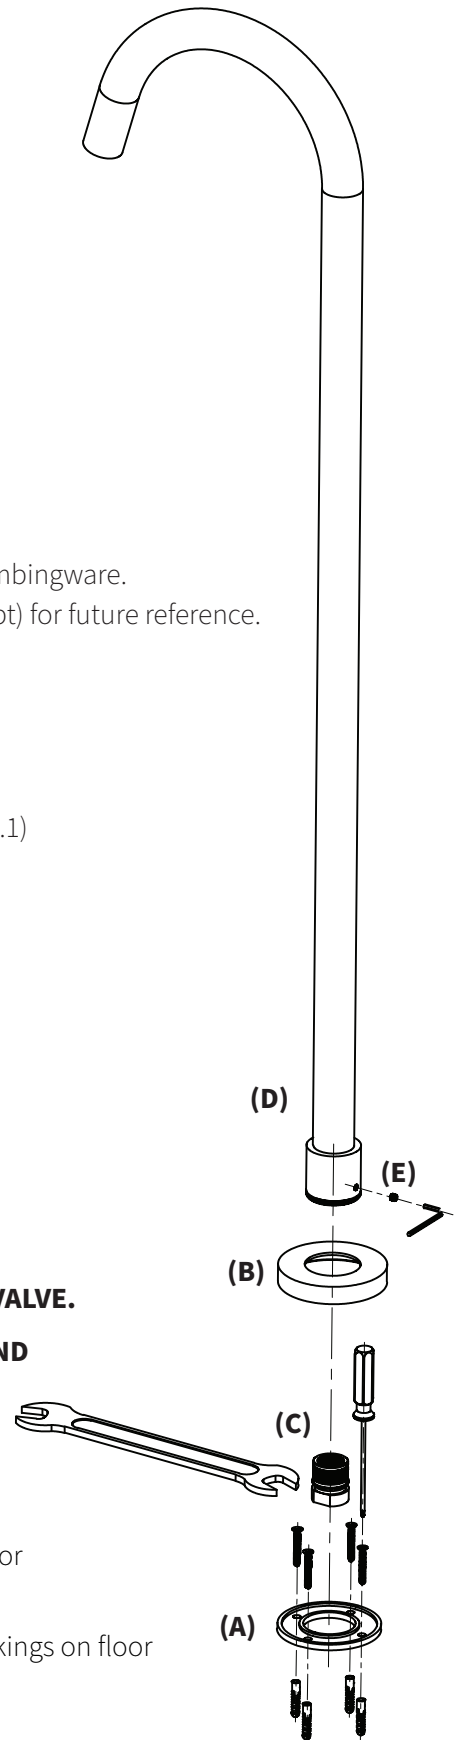

ATTACH PROOF OF PURCHASE HERE

4. Remove the brass threaded spigot (C) from the base of the spout (D) by unscrewing the grub screw (E), as shown.
5. Screw the brass spigot (C) onto the water connection in the floor.
6. Thread the cover plate (B) onto the spout (D).
7. Screw the spout (D) onto the brass spigot (C), and into the base plate (A).
8. Tighten grub screw (E) firmly onto brass spigot (C).
9. Apply appropriate sealant (not supplied) between brass base plate (A) and spout (D).
10. Screw down the cover plate (B) onto the base plate (A).
11. Turn on water supply, check for leaks.

WARRANTY

PLEASE CALL US BEFORE REMOVING OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion. See website for full care instructions: www.vodaplumbingware.co.nz/tapware-care-instructions/

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

