


Wall Mounted Shower Rose **VDSR1**

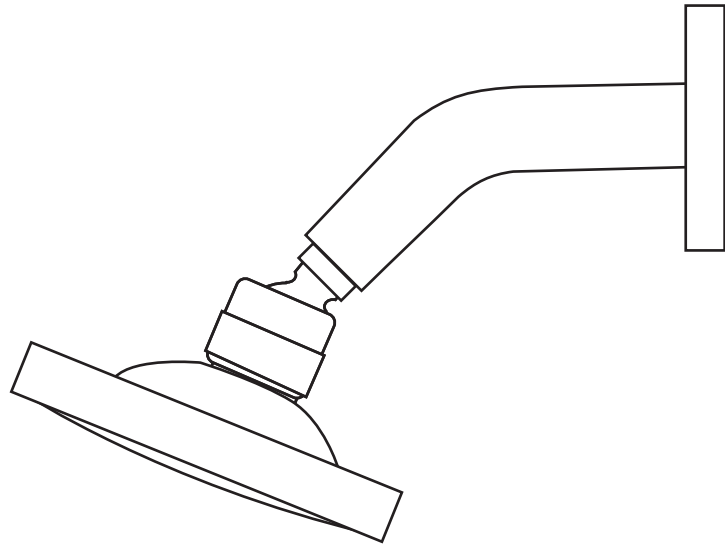

9 421027 597143

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems Remove the flow restrictor from the ball joint and replace with the rubber washer (supplied).


Equal Low systems Remove the flow restrictor from the ball joint and replace with the rubber washer (supplied).

INSTALLATION

For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.

- Before commencing installation turn off water supply.
- Screw the shower arm to the wall connection and tighten, using a liberal amount of teflon thread tape or hemp and grease at the wall connection (see diagram)
- Turn on water supply
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

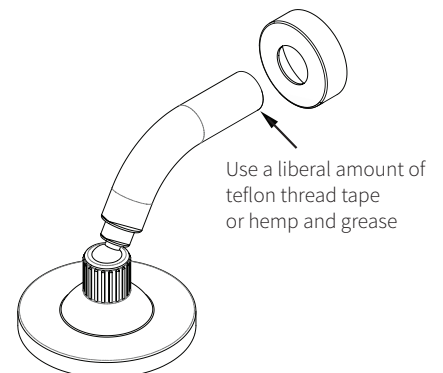

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: **www.vodaplumbingware.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 FORENO (0508 367 366) – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning your Voda product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.