

OLYMPIA Pullout Sink Mixer VOP14

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa* (As per NZ Building Code AS/NZ 3500.1)

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low systems Not suitable.


Equal Low systems Not suitable.

IMPORTANT NOTICE FOR THE HOUSE HOLDER

The VOP14 Pullout Sink Mixer features a push button ON/OFF controller on the handpiece. It is designed to be switched to the OFF position for short periods of use whilst the sink is being used, and should not be used as an ON/OFF controller for extended periods and/or whilst the sink mixer is not in use.

The Hot/Cold mixer lever should not be left in the OPEN position for extended periods with the handpiece control set to OFF, as the sustained water pressure could cause the pullout hose between the mixer and the handpiece to rupture.

Always return the Hot/Cold mixer to the CLOSED position and the Push button to the ON position when you have finished using the sink mixer.

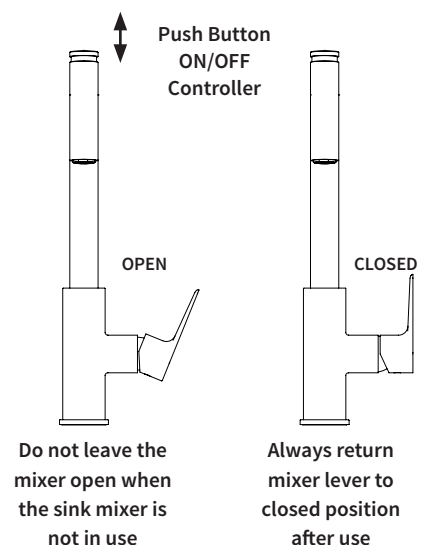

ATTACH PROOF OF PURCHASE HERE

INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.**

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Anchor to bench with fittings pack.
- Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters.
- Connect supply hoses to plumbing connections.

Maximum bend for flexible hose is 35mm radius.

Do not stretch, crush or twist hoses. Do not swage hose ends.

- Turn on mains supply.
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

