
VODA
PLUMBINGWARE

ONYX
Diverter Shower Mixer
VOX35 features Voda Refresh™

LEAD-FREE

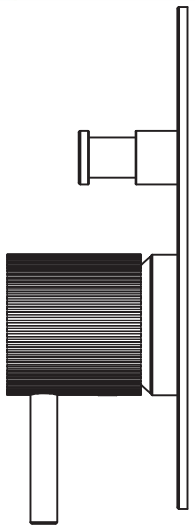


Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only
Minimum Pressure = 150kPa
Maximum operating Pressure = 500kPa*
(As per NZ Building Code AS/NZS 3500)
Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

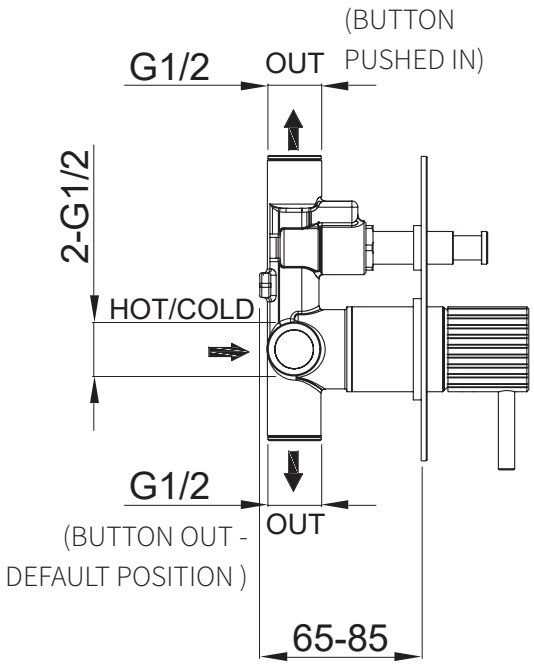


CONFIGURATION

Mains Pressure systems	Install as supplied.
Unequal Low systems	This product is not suitable for this type of water pressure.
Equal Low systems	This product is not suitable for this type of water pressure.


INSTALLATION


***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**
Installation must comply with Section 5.4 of AS/NZS 3500 Standard with regard to Isolating stop cock use. Shower mixers must be water tested with the outlet open to prevent damage to cartridge due to back pressure.

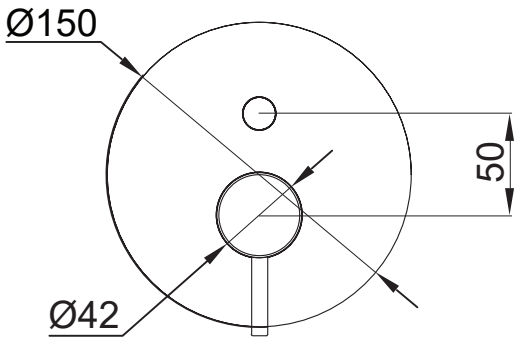

- **The H marked port is for the hot supply line which is to the left side**.
- Inline filters are recommended, particularly on the cold water supply line, to ensure cartridge longevity. Any water seepage ex-the cartridge cavity opening can be stopped by re-tightening the large brass retaining nut.
- Turn on mains supply. Check for leaks.
- **Plumbers Note: Do not pressure test this mixer under static pressure.**

ATTACH PROOF OF PURCHASE HERE

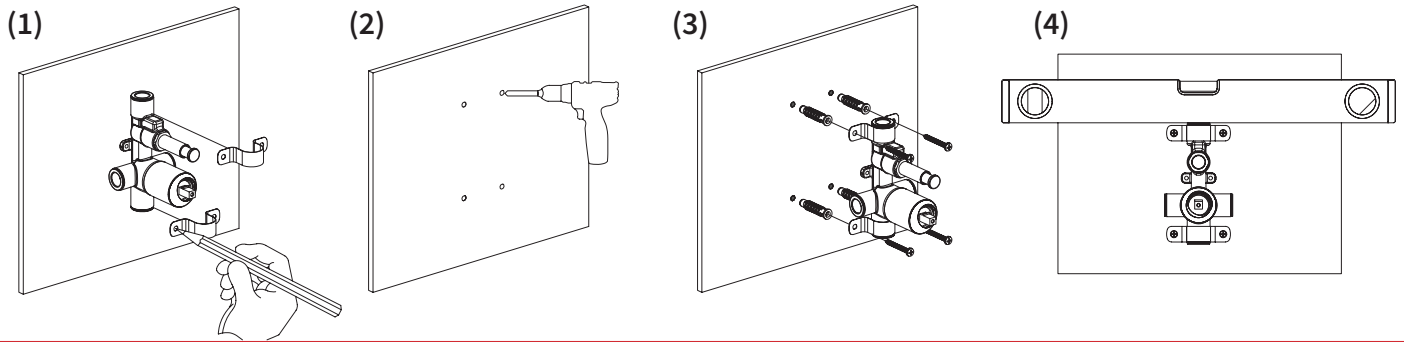


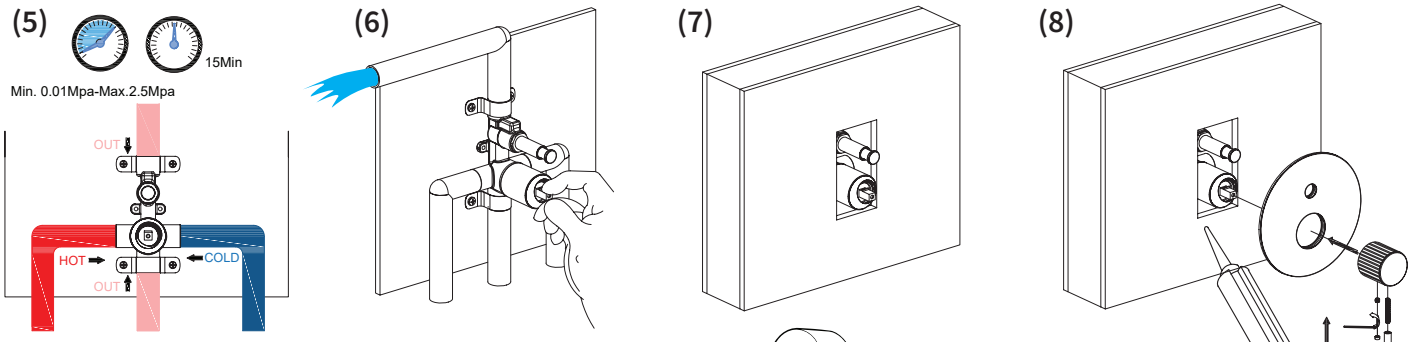

Features Voda Refresh™ in-wall system & Trim Kit

Voda Refresh™ allows the concealed in-wall body of your mixer to be installed during first fitout, with the coloured trim kit fitted after the wall finishings are completed.

- The coloured trim kits consists of Smooth Lever (1A), Grooved Lever (1B), Body Sleeve (2), Faceplate (3), and Diverter inwall assembly (4). The body sleeve (2) slides over the body (4a) and screws onto the cartridge retaining nut (4b).
- It is recommended to keep the protective sleeve on mixer body, and fit trim kit only after completing wall lining, to ensure no damage occurs to the components or the mixer body.
- Avoid restrictive piping, fittings or sharp angled bends when plumbing for this mixer.
- Fit required lever (1A) or (1B) to the mixer. The spare lever can be kept for any future changes in preference or design aesthetic.

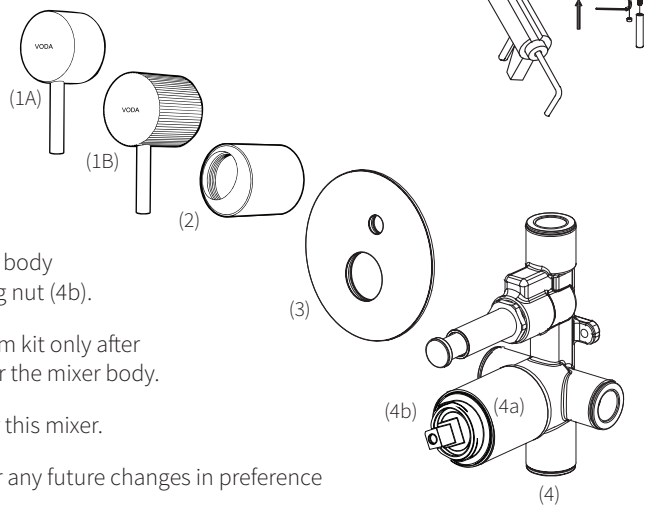

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: **www.vodaplumbingware.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion. See website for full care instructions: **www.vodaplumbingware.co.nz/tapware-care-instructions/**

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

Master Plumbers Representing Excellence | Master Gasfitters Representing Excellence = Master Drainlayers Representing Excellence