


PROLINE Basin Faucet VPLN450LFCH

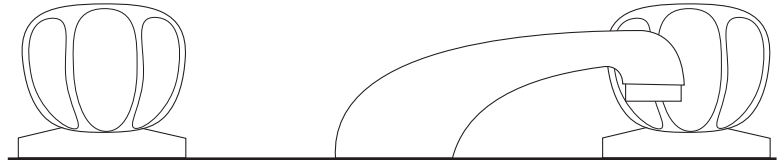

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa*

(As per NZ Building Code AS/NZ 3500)

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Change aerator to mains pressure one supplied.

Unequal Low systems Install as supplied.


Equal Low systems Install as supplied.

INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**

NOTE: In order to remove handles, the chrome disc needs to be prised out and handle retaining screw undone.

- Before commencing installation, turn off the water supply.
- 30mm holes are required for each tap body and 24mm hole for the spout spigot. The tap bodies may be spaced at between 150mm & 200mm hole centres. NB: The vanity top thickness must not exceed 38mm.
- Once the holes are drilled, wind the back-nuts (7) back on the tap bodies to allow for a minimum 4 thread protrusion above the vanity top.
- Cut the breech pipe (item 10) to the correct size.
- Fit the spout with flat washer (2) on the top and flanged back-nut (3) underneath. Tighten.

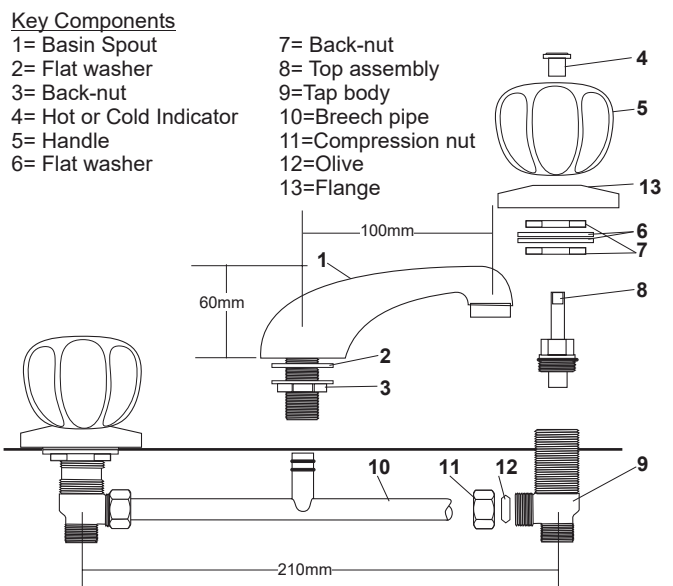

ATTACH PROOF OF PURCHASE HERE

- Fit the breech pipe to the tap bodies and push the centre spigot into the spout tail and the tap bodies into the drilled holes.
- Place the mounting washers and flanges on the tap bodies; tighten down.
- Tighten compression nut and olive (11 & 12) on either end of the breech pipe.
- Place handles on and screw on Indicator nuts (4)
- Turn on the water supply.
- Check for leaks.

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

See website for full care instructions: www.vodaplumbingware.co.nz/tapware-care-instructions/

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

