

PRO SERIES Slide Shower VPRS040



Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa*

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION



Mains Pressure systems Install the flow regulator as shown in the diagram below.

Unequal Low systems Install as supplied.

Equal Low systems Install as supplied.


CONTENTS

- Wall bracket/cover
- Screws
- Glide bar with adjuster/holder
- Soap dish
- Handpiece
- 1.5m shower hose
- Supply elbow

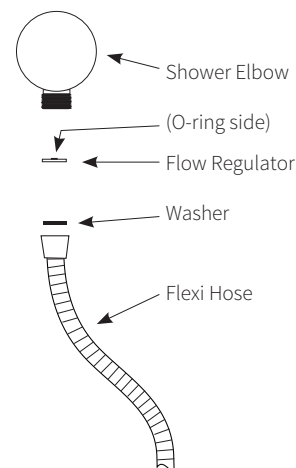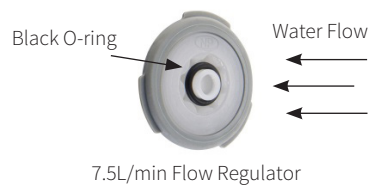

INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.**

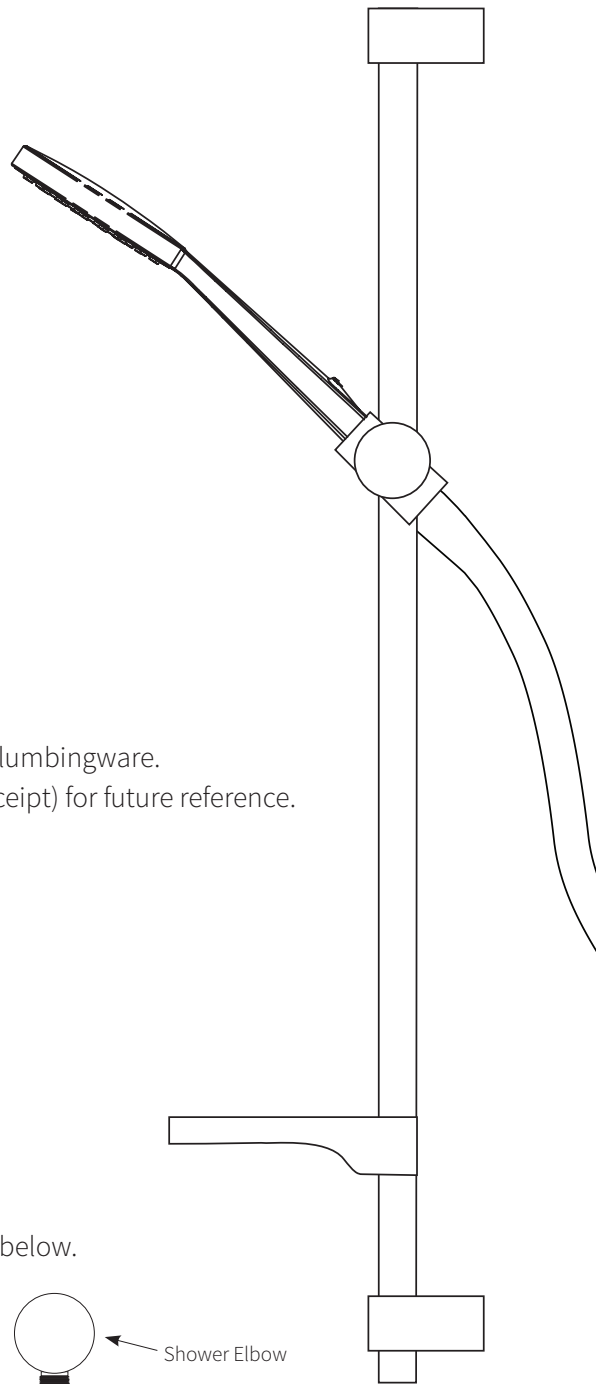

ATTACH PROOF OF PURCHASE HERE

CAUTION: If using your own screws to install the wall brackets, DO NOT use counter sunk type screws as this will void the warranty.

- Prior to installation, ensure mains water is turned off.
- Fix bottom bracket to wall.
- Fit soap dish to glide bar.
- Insert bar in wall bracket with the black adjuster button of handpiece holder on the underside.
- Fit upper wall bracket and attach chrome bracket covers.
- Fix supply elbow to wall outlet.
- Insert handpiece, attach hose with conical end to the handpiece.
- Turn on mains.
- Check for leaks.

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

NOT TO BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.