


## **PRO SERIES** 3 Function Slide Shower **VPRS041**

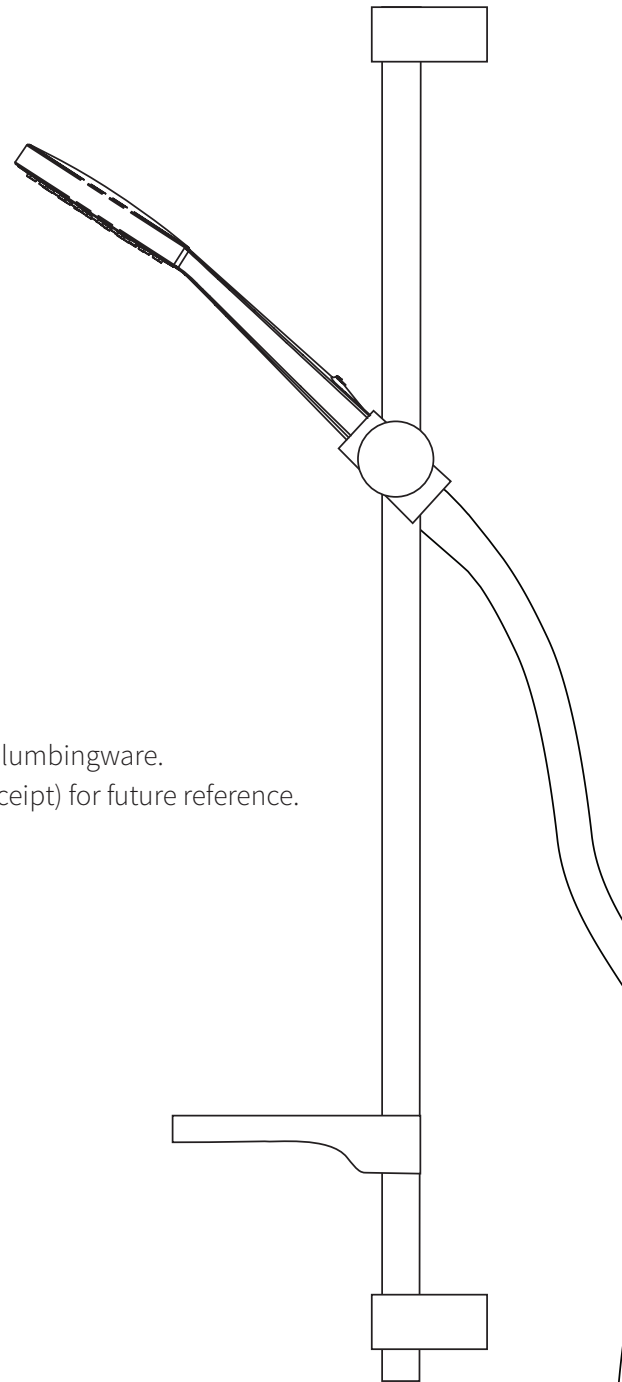

9 421027 595255

Congratulations on your purchase of this high quality product from Voda Plumbingware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### **TECHNICAL SPECIFICATIONS**

#### **Suitable for Mains Pressure Only**

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### **CONFIGURATION**

Mains Pressure systems Install as supplied.

Unequal Low systems Not suitable.

Equal Low systems Not suitable.

### **CONTENTS**

- Wall bracket/cover
- Screws
- Glide bar with adjuster/holder
- Soap dish
- 1.5m shower hose
- Supply elbow

ATTACH PROOF OF PURCHASE HERE

## INSTALLATION

**CAUTION: If using your own screws to install the wall brackets, DO NOT use counter sunk type screws as this will void the warranty.**

- Prior to installation, ensure mains water is turned off.
- Fix bottom bracket to wall.
- Fit soap dish to glide bar.
- Insert bar in wall bracket with the black adjuster button of rose holder on the underside.
- Fit upper wall bracket and attach chrome bracket covers.
- Fix supply elbow to wall outlet.
- Insert rose, attach hose with conical end to the rose.
- Turn on mains.
- Check for leaks.

## WARRANTY

Please refer to our website for warranty information: [www.vodaplumbingware.co.nz/warranty](http://www.vodaplumbingware.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

## CARE AND MAINTENANCE

**NOT TO BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.**

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.