

Pro Series WetRail Multifit Single Function Slide Shower

VPRS042



Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION


Mains Pressure systems Install the flow restrictor as shown in the restrictor pack.

Unequal Low systems Install as supplied.

Equal Low systems Install as supplied.

CONTENTS

- Rail set
- Soap tray
- 1.5m flexi-hose
- Air drive handset
- Chrome cover plug
- Brass wall bracket insert
- Chrome wall flange
- Fixing screws
- WELs disc (with instructions)
- Allen key tool

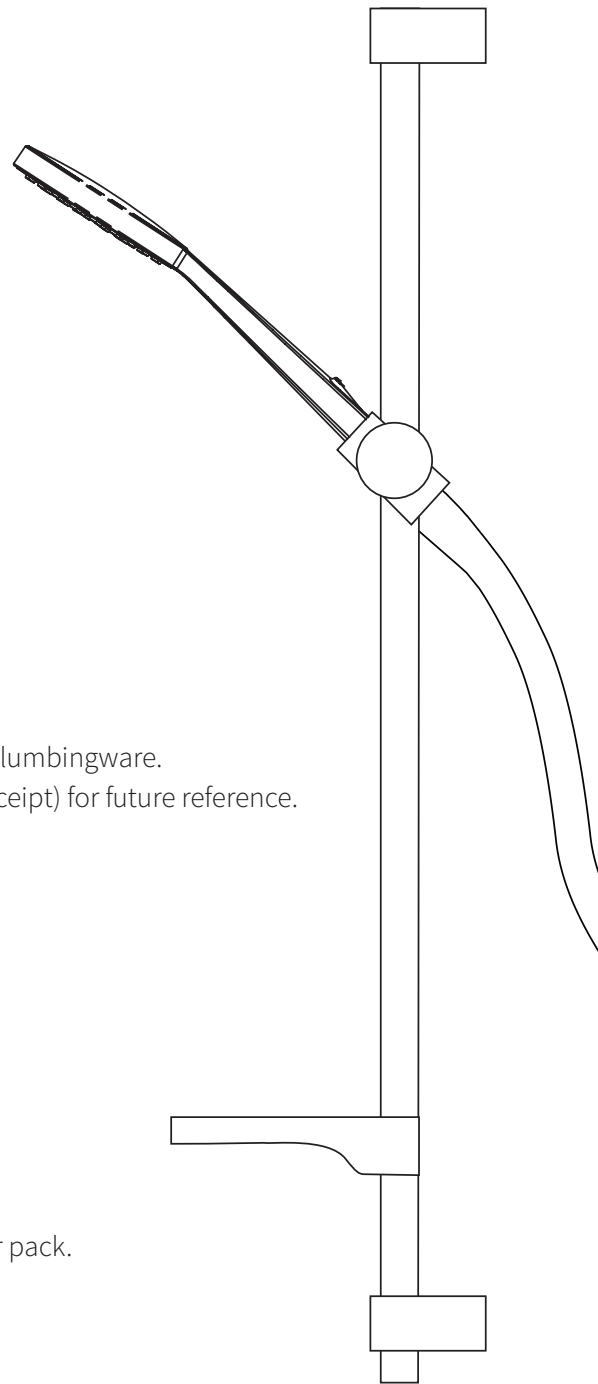

ATTACH PROOF OF PURCHASE HERE

INSTALLATION (WETRAIL FORMAT)

- Prior to installation, ensure mains water is turned off.
- Remove rail set from pack, detach bottom bracket (internal allen screw), fit soap tray, refit bracket.
- Screw brass tubing to bridge wingback to top supply bracket. Fit top water connection (i.e. remove inlet ferrule from top bracket to do this, being careful not to damage the sealing O-rings).
- Mark bottom bracket location and fit wall disc.
- Slide rail set onto both top and bottom brackets, secure with allen screws and allen tool provided.
- Fit hose and handset.
- Turn on mains.
- Check for leaks.

ADDITIONAL INSTALLATION INSTRUCTIONS FOR ALTERNATIVE SUPPLY ELBOW FORMAT

- Utilise additional brass wall bracket insert provided for top bracket.
- Remove rail chrome end thread with allen key, fit chrome cover plug provided.
- Attach the supply elbow to the supply connection on the wall.
- Insert rose, attach hose with conical end to the rose.

WARRANTY

Please refer to our website for warranty information:
www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

Chrome-plated finishes should not be cleaned with astringent, abrasive or citric cleaners. A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

