


TIDE Deluxe Slide Shower (Round) VTD61R

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

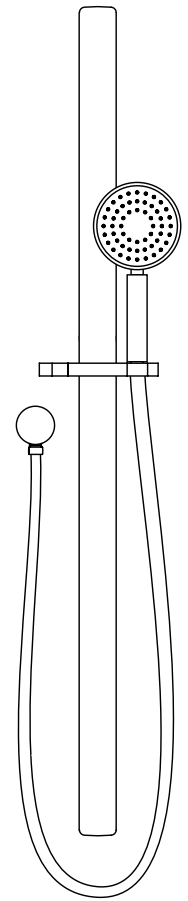

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 35kPa

Maximum operating Pressure = 500kPa*

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION



Mains Pressure systems Install the supplied flow restrictor between the shower hose and supply elbow with the black O-ring facing towards the direction of water flow (see image below).

Unequal Low systems Install as supplied.

Equal Low systems Install as supplied.

CONTENTS



- Rail with adjuster/holder
- Wall brackets and covers
- Fixing kit
- 1.5m supply hose
- Supply elbow
- Shower handpiece
- 8L/min Flow regulator for Mains Pressure installation

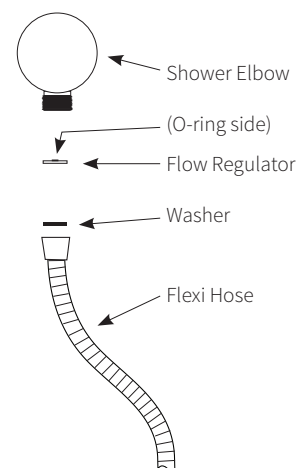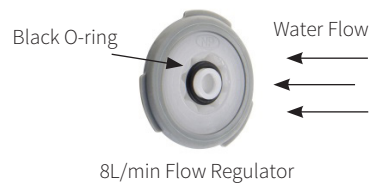

INSTALLATION


***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY.**

ATTACH PROOF OF PURCHASE HERE

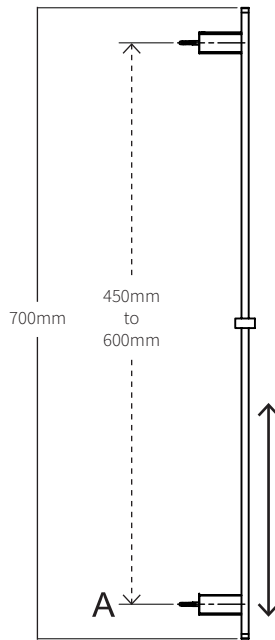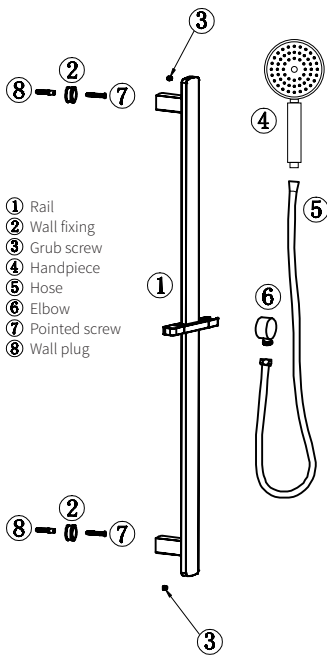

1. Measure and mark hole positions (at points A and B) with a pencil at the required distance (max. 600mm apart).
2. Drill two mounting holes where you have marked.
3. Fit the wall plugs into the drilled holes, and attach the wall fixings with screws (supplied).
4. Push the rail bracket onto the wall fixings, then tighten the grub screws with Allen key.
5. Screw elbow onto plumbing wall inlet.
6. Attach hose to elbow and handpiece, and fit shower handpiece into holder.

Bottom wall bracket can be adjusted to achieve desired height.

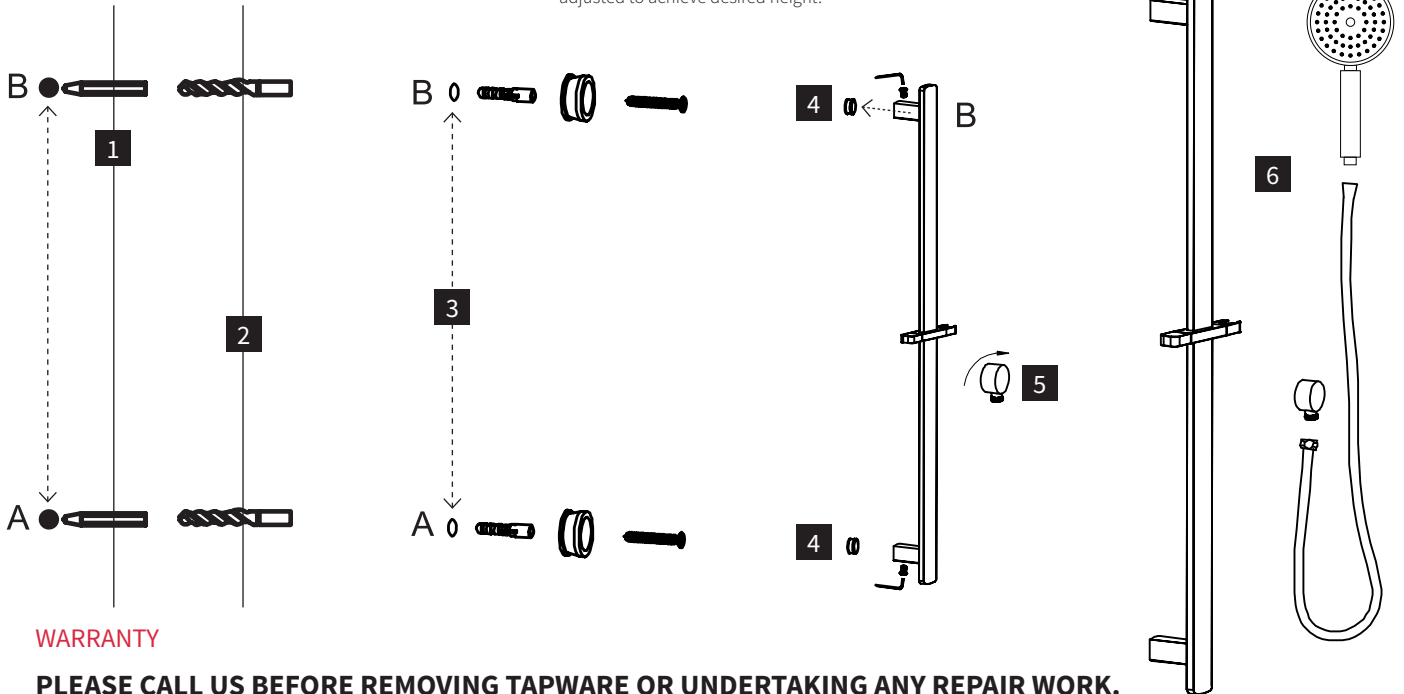

WARRANTY

PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

PROUD PARTNER AND SUPPORTER OF MASTER PLUMBERS, GASFITTERS AND DRAINLAYERS

